



IC-F1000T IC-F2000T

VHF AND UHF TRANSCEIVERS



IC-F1000T



IC-F2000T

Little Radio, Big Sound! Class Leading 1500 mW Audio and Full of Great Features

The IC-F1000/F2000 series provides class leading 1500 mW loud and clear audio with Icom custom high power handling capacity speaker. It offers a compact, waterproof durable design and is full of great features such as motion/stationary detection sensor, man down, voice scrambler and voice announcement functions. The radio is ideal for business and industry users who require economical value and reliability in a radio.

- | Icom custom high power handling capacity speaker for 1500 mW powerful audio
- | Compact, waterproof durable design (IP67 and MIL-STD-810-G)
| Tested to 12 categories of MIL-STD-810-G environmental tests
- | Enhanced emergency safety with built-in motion/stationary detection sensor
- | 128 channel capacity with eight zones
- | Built-in 2-Tone, 5-Tone, CTCSS and DTCS
- | MDC and BISS compatible
- | 16-code inversion voice scrambler
- | Man down and lone worker functions
- | Up to 14 hours of operating time with supplied BP-279 battery
- | 16-position rotary selector and ON/OFF volume knob
- | "Shift key" function increases number of programmable key assignments
- | Eight character alphanumeric display
- | Three colour LED

SPECIFICATIONS

	IC-F1000T	IC-F2000T
GENERAL		
Frequency coverage (MHz)	136-174MHz	400-470MHz
Number of channels	128 channels	
Type of emission	16K0F3E /11K0F3E	
Channel spacing	12.5/25kHz	
Power supply requirement	7.5V DC nominal	
Current drain (typical)		
Tx High	1.3A	1.3A
Rx Max.audio/Standby	330mA (internal SP)/77mA	300mA (internal SP)/80mA
Antenna impedance	50Ω	
Operating temperature range	-30°C to +60°/-22°F to +140°F (Radio specification)	
Dimensions (WxHxD) (Projections not included)	52.2x111.8x24.5mm; 2.06x4.4x0.96 in (With BP-279)	
Weight (approx.)	240g; 8.47oz(with BP-279)	
TRANSMITTER		
Output power	5W, 2W, 1W (Hi,L2,L1)	
Max. frequency deviation	±5.0kHz/±2.5kHz (wide/Narrow)	
Frequency stability	±2.5ppm	
Spurious emissions	80dB	75dB
Audio frequency response	+1dB to -3dB of 6dB/octave range from 300Hz to 3000Hz (Wide) /2550 (Narrow)	
Adjacent channel power	75/70dB (Wide/Narrow)	
FM Hum and noise	55/50dB (Wide/Narrow)	
Audio harmonic distortion	1.0%/1.5% (W/N, AF 1kHz 40% deviation)	
Ext. microphone connector	3-conductor 2.5 (d) mm (1/16")/2.2kΩ	
RECEIVER		
Sensitivity (at 12dB SINAD)	0.25μV	
Adjacent channel selectivity	76/70dB (W/N)	75/70dB (W/N)
Spurious response	80dB	
Audio frequency response	+1dB to -3dB of 6dB/octave range from 300Hz to 3000Hz (Wide) /2550Hz (Narrow)	
Intermodulation	75dB	
Hum and noise	55/50dB (Wide/Narrow)	
Audio output power	1500mW (at3% distortion)	
External speaker connector	2-conductor 3.5 (d) mm (1/8")/8 Ω	

Measurements made in accordance with TIA-603.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	-
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust and Water	IP67 (Dust-tight and waterproof protection)

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details




Battery packs	Type	Capacity	Operatings time*
BP-279	Li-ion 7.2V	1600mAh	14 hours (Approx.)
BP-280	Li-ion 7.2V	2450mAh	20 hours (Approx.)

*Tx; Rx; standby = 5:5:90. Power save function ON. Capacity : Typical Spec.




*1 BC-123SA for 120V AC, SE for 230V AC, SV for 240V AC.




Charges up to six BP-279 battery packs in 2.5 hours (approx.).



For use with BC-213 For use with BC-214




Either VS-4LA or OPC-2004LA is required when using HS-97

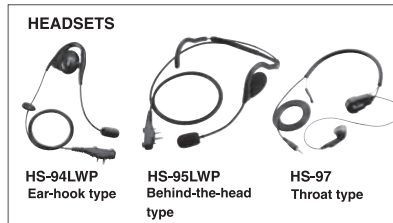

Same as supplied



AD-130 AD-130 charger adapter is supplied with the BC-214.

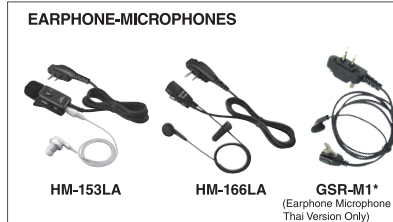

STANDARD ANTENNAS
 • FA-SC25V: 136-150MHz • FA-SC72U: 470-520MHz
 • FA-SC55V: 150-174MHz • FA-SC01U: 350-400MHz
 • FA-SC25U: 400-430MHz • FA-SC25V: 330-380MHz
 • FA-SC57V: 430-470MHz

STUBBY ANTENNAS
 • FA-SC26VS: 136-144MHz • FA-SC26US: 400-450MHz
 • FA-SC27VS: 142-150MHz • FA-SC27US: 450-490MHz
 • FA-SC56VS: 150-162MHz
 • FA-SC57VS: 162-174MHz

CUT ANTENNAS HIGH GAIN ANTENNAS
 • FA-SC61VC: 136-174MHz • FA-SC62V: 150-160MHz
 • FA-SC61UC: 380-520MHz • FA-SC63V: 155-165MHz

Supplied accessories: (May differ depending on version)
 • Battery pack, BP-279 or BP-280 • Desktop charger, BC-213 • AC adapter, BC-123S
 • Belt clip, MB-133 • Antenna



The "3D GENUINE Icom label" is attached to the rear chassis under the battery. Check the Icom website for details: <http://www.icom.co.jp/world/genuine/info/>

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. All trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world

Count on us!

Icom America Inc.
 12421 Willows Road NE,
 Kirkland, WA 98034, U.S.A.
 Phone: +1 (425) 454-8155
 Fax: +1 (425) 454-1509
 E-mail: sales@icomamerica.com
 URL: <http://www.icomamerica.com>

Icom (Europe) GmbH
 Communication Equipment
 Auf der Krautweide 24
 65812 Bad Soden am Taunus, Germany
 Phone: +49 (6196) 76685-0
 Fax: +49 (6196) 76685-50
 E-mail: info@icomeurope.com
 URL: <http://www.icomeurope.com>

Icom France s.a.s.
 Zac de la Plaine,
 1 Rue Brindejonec des Moulins, BP 45804,
 31505 Toulouse Cedex 5, France
 Phone: +33 (5) 61 36 03 03
 Fax: +33 (5) 61 36 03 00
 E-mail: icom@icom-france.com
 URL: <http://www.icom-france.com>

Asia Icom Inc.
 6F No. 68, Sec. 1 Cheng-Teh Road,
 Taipei, Taiwan, R.O.C.
 Phone: +886 (02) 2559 1899
 Fax: +886 (02) 2559 1874
 E-mail: sales@asia-icom.com
 URL: <http://www.asia-icom.com>

Icom Canada
 Glenwood Centre #150-6165
 Highway 17A, Delta, B.C.,
 V4K 5B8, Canada
 Phone: +1 (604) 952-4266
 Fax: +1 (604) 952-0090
 E-mail: info@icomcanada.com
 URL: <http://www.icomcanada.com>

Icom Spain S.L.
 Ctra. Rubi, No. 88 "Edificio Can Castanyer"
 Bajos A 08174, Sant Cugat del Valles,
 Barcelona, Spain
 Phone: +34 (93) 590 26 70
 Fax: +34 (93) 590 04 46
 E-mail: icom@icomspain.com
 URL: <http://www.icomspain.com>

Icom (Australia) Pty. Ltd.
 Unit 1 / 103 Garden Road,
 Clayton, VIC 3168 Australia
 Phone: +61 (03) 9549 7500
 Fax: +61 (03) 9549 7505
 E-mail: sales@icom.net.au
 URL: <http://www.icom.net.au>

Shanghai Icom Ltd.
 No.101, Building 9, Caifuxingyuan Park,
 No.188 Maoting Road, Chedun Town,
 Songjiang District, Shanghai, 201611, China
 Phone: +86 (021) 6153 2768
 Fax: +86 (021) 5765 9987
 E-mail: bjicom@bjicom.com
 URL: <http://www.bjicom.com>

Icom Brazil
 Rua Itororó, 444 Padre Eustáquio
 Belo Horizonte MG,
 CEP: 30720-450, Brazil
 Phone: +55 (31) 3582 8847
 Fax: +55 (31) 3582 8987
 E-mail: sales@icombrasil.com

Icom (UK) Ltd.
 Blacksole House, Altira Park,
 Herne Bay, Kent, CT6 6GZ, U.K.
 Phone: +44 (0) 1227 741741
 Fax: +44 (0) 1227 741742
 E-mail: info@icomuk.co.uk
 URL: <http://www.icomuk.co.uk>

Icom New Zealand
 39C Rennie Drive, Airport Oaks,
 Auckland, New Zealand
 Phone: +64 (09) 274 4062
 Fax: +64 (09) 274 4708
 E-mail: inquiries@icom.co.nz
 URL: <http://www.icom.co.nz>

Your local distributor/dealer:

บริษัท ยี. ซิมมอน เตรีโอ จำกัด
 1 อาคารเอ็มทีทาวเวอร์ ชั้น16 ห้องเอ-ซี2
 ช.บางนา-ตราด25 แขวงบางนา เขตบางนา
 กรุงเทพมหานคร 10260
 โทร:0816439181
 Fax:0-2361-8275
 Email:info@gsimon.com